

VIACOMAC 32 NYMIX 630

GODSTERMINALEN LULEÅ 2002



Laster

Service Weight = 89000Kg

- **Front Axle pressure L1 unloaded/loaded = 48300/113800 Kg**
- **Front Axle pressure L2 unloaded/loaded = 51800/112500 Kg**
- **Front Axle pressure L3 unloaded/loaded = 58400/105400 Kg**
- **Rear Axle pressure L1 unloaded/loaded = 40700/20200 Kg**
- **Rear Axle pressure L2 unloaded/loaded = 37200/13500 Kg**
- **Rear Axle pressure L3 unloaded/loaded = 30600/7600 Kg**
- **Terminal designed to handle 1200 containers per day**

Uppbyggnad

Yta: ca 22.000 m²

Beläggning:

2*100 mm Viacomac 32 Nymix 630 (8 200 ton)

50 mm ABb 22 70/100 med NBS


40 mm ABS 16 70/100 (utföres 2003)

Recept

- Makadam 16-32
- Kilsten 8-11
- Emulsion Nymix 630 4,0-4,5%
- Restbitumen ca 2,5-3,0%
- Fuktkvot 2%





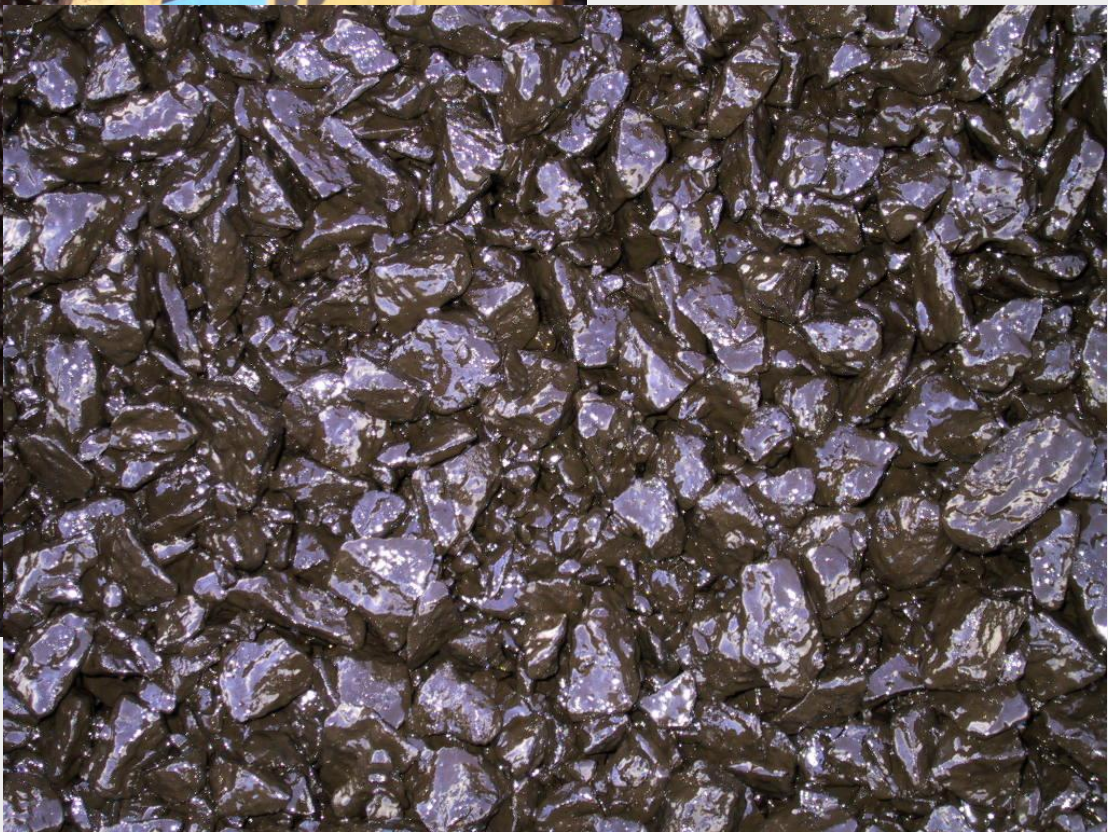











■ 2011



